

# FIRE ALARM CALL POINT D-118



## DESCRIPTION

Demco Manual Call Point **D-118** is suitable for open or close circuit system and is professionally designed for use in fire detection systems with central control equipment. Alternative terminals are provided for open or close circuits. When wired for open circuit operation, the circuit closes instantly when the glass is broken. Cable knockout seals are provided for 3/4" Ø conduit entries from top, bottom and the back. The casings are moulded from specially selected engineering plastic, which comes in 5 different colours, with high impact strength, high resistance to heat. All metal parts are made of brass and phosphor bronze to ensure life long resistance against corrosion.

## DEMCO ADVANTAGES

- Double terminal wire connectors for independent input and output connections which facilitate installations when used in looping.
- Instant test operation is available through activation utilizing a special key provided.
- Suitable for surface or flush mounting.




RANGE OF CASING COLOURS  
White, Yellow, Green, Red, Blue

## SPECIFICATION

Size	88mm X 88mm X 55mm
Current Ratings	12/24V DC 10A 48V DC 3A 250V AC 10A
Net/Gross Weight	150/176g
Connections	TERMINAL- MAX 2.5mm <sup>2</sup> CABLE

## OPTIONAL FEATURES

- Polycarbonate transparent protection cover
- Different range of casing colours—white, yellow, green, red, blue
- Specific languages available on facial layout upon request.

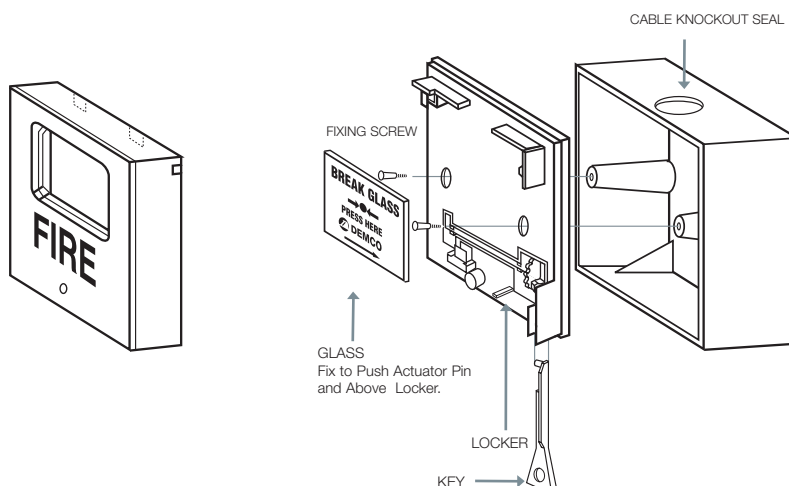

9 Lrg 38 • Kaw 16  
off Jln Connaught Bridge  
Industrial Site  
41300 Klang, Selangor D.E.  
W. MALAYSIA  
TEL: 603•33423488, 89  
FAX: 603•33421926  
E-MAIL: demco@tm.net.my  
URL: www.demcoalarm.com